



Cat[®] 305.5E CR

MINI HYDRAULIC EXCAVATOR

FEATURES:

The Cat[®] 305.5E CR Mini Hydraulic Excavator delivers high performance in a compact design to help you work in the tightest applications. The 305.5E CR features the following:

- **Fingertip control for the boom swing and auxiliary hydraulic functions** makes operation easier while providing more room on the floor for the operator's feet.
- **Compact Radius Design** lets you work within confined areas. The radius of the upper body stays within 140 mm (5 in) of the undercarriage so the operator can concentrate on the work being done without having to worry about the back of the machine.
- **High digging forces, fast cycle times, and excellent stability** boosts your productivity.
- **Over 200 degrees of bucket rotation** provides greater material retention during truck loading and easier flat wall digging without having to reposition the machine.
- **100% pilot controls and a load sensing hydraulic system.**

NEW STANDARD FEATURES ON THE 305.5E CR ARE MADE POSSIBLE WITH THE *COMPASS* (Complete Operation, Maintenance, Performance, And Security System) CONTROL PANEL:

- **Security System:** A standard anti-theft device uses a 5 digit alphanumeric password that is required to start the machine (when the security system is enabled).
- **Adjustable Work Tool Auxiliary Flow Control:** Simple adjustability of the hydraulic flow going down the boom and stick to the work tool. This is done by a simple selection from a flow of 1-15.
- **Continuous Flow:** Set the auxiliary flow in any direction and at any speed simply, safely, and easily on the right hand joystick.
- **Economy Mode:** Save up to 20% fuel while maintaining high productivity with a push of a button.

Specifications

Engine

Engine Model	Cat [®] C2.4	
Rated Net Power @ 2,400 rpm		
ISO 9249/EEC 80/1269	32.9 kW	44.2 hp
Gross Power		
ISO 14396	34.1 kW	45.7 hp
Bore	87 mm	3.4 in
Stroke	102.4 mm	4 in
Displacement	2.4 L	146 in ³

Weights*

Operating Weight with Canopy	5270 kg	11,618 lb
Operating Weight with Cab	5415 kg	11,938 lb

*Weight includes counterweight, rubber tracks, bucket, operator, full fuel and auxiliary lines.

Travel System

Travel Speed – High	4.6 km/h	2.8 mph
Travel Speed – Low	2.8 km/h	1.7 mph
Max Traction Force – High Speed	26.8 kN	6,025 lb
Max Traction Force – Low Speed	47.8 kN	10,745 lb
Ground Pressure	30 kPa	4.4 psi
Gradeability (maximum)	30°	

Service Refill Capacities

Cooling System	11 L	2.9 gal
Engine Oil	9.5 L	2.5 gal
Fuel Tank	63 L	16.6 gal
Hydraulic Tank	68.3 L	18 gal
Hydraulic System	78 L	20.6 gal

Hydraulic System

Load Sensing Hydraulics with Variable Displacement Piston Pump		
Pump Flow at 2,400 rpm	129.6 L/min	34.2 gal/min
Operating Pressure – Equipment	245 bar	3,553 psi
Operating Pressure – Travel	245 bar	3,553 psi
Operating Pressure – Swing	185 bar	2,690 psi
Auxiliary Circuit – Primary (186 bar/2,734 psi)	70 L/min	18.5 gal/min
Auxiliary Circuit – Secondary (174 bar/2,524 psi)	38 L/min	10 gal/min
Digging Force – Stick (standard)	28.9 kN	6,500 lb
Digging Force – Stick (long)	24.8 kN	5,575 lb
Digging Force – Bucket	50.9 kN	11,445 lb

Swing System

Machine Swing Speed	9 rpm
Boom Swing – Left*	80°
Boom Swing – Right	50°


*Automatic swing break, spring applied, hydraulic release.

Blade

Width	1980 mm	78.0 in
Height	375 mm	14.8 in
Dig Depth	540 mm	21.3 in
Lift Height	420 mm	16.5 in



305.5E CR Mini Hydraulic Excavator

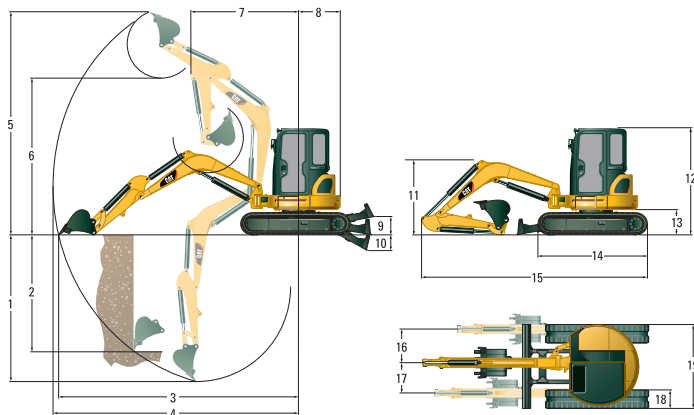

Dimensions

	Standard Stick		Long Stick	
1	3470 mm	11'4"	3870 mm	12'8"
2	2330 mm	7'8"	2730 mm	9'0"
3	5630 mm	18'6"	6020 mm	19'9"
4	5790 mm	19'0"	6170 mm	20'3"
5	5330 mm	17'6"	5590 mm	18'4"
6	3820 mm	12'7"	4080 mm	13'4"
7	2400 mm	7'10"	2530 mm	8'3"
8	1130 mm	3'8"	1130 mm	3'8"
9	405 mm	1'4"	405 mm	1'4"
10	555 mm	1'10"	555 mm	1'10"
11	1740 mm	5'8"	2150 mm	6'11"
12	2550 mm	8'4"	2550 mm	8'4"
13	615 mm	2'0"	615 mm	2'0"
14	2580 mm	8'6"	2580 mm	8'6"
15	5330 mm	17'6"	5460 mm	17'10"
16	785 mm	2'7"	785 mm	2'7"
17	695 mm	2'3"	695 mm	2'3"
18	400 mm	1'4"	400 mm	1'4"
19	1980 mm	6'6"	1980 mm	6'6"

Lift Capacities at Ground Level*

Lift Point Radius		3000 mm (9'8")		4500 mm (14'9")	
		Front	Side	Front	Side
Blade Down	kg	2590	1290	1380	690
	(lb)	(5,710)	(2,844)	(3,042)	(1,521)
Blade Up	kg	1550	1150	820	620
	(lb)	(3,417)	(2,535)	(1,808)	(1,367)

*The above loads are in compliance with hydraulic excavator lift capacity rating standard ISO 10567:2007 and they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity. The excavator bucket weight is not included on this chart. Lifting capacities are for standard stick.

STANDARD EQUIPMENT

- 1-way and 2-way (combined function) auxiliary hydraulic lines
- Adjustable auxiliary flow control for work tools
- Adjustable wrist rests
- Alternator
- Anti-theft security system
- Automatic engine idle
- Automatic swing park brake
- Automatic two speed travel
- Auxiliary line quick disconnects
- Boom cylinder guard
- Cab mounted work light
- Canopy with FOPS ISO 10262 (Level 1) and Tip-Over Protection (TOPS) ISO 12117
- Coat hook
- COMPASS display panel
- Cup holder
- Continuous flow
- Control pattern changer (not available in Europe)
- Dozer blade with float function
- Economy mode setting for up to 20% fuel savings
- Floor mat
- Foot travel pedals
- Gauges or indicators for fuel level engine coolant temperature, hour meter, engine oil pressure, air cleaner, alternator and glow plugs, service interval
- Horn
- Hydraulic oil cooler
- Lifting eye on bucket linkage (standard equipment for all regions except Europe)
- Lockable storage box
- Low maintenance linkage pin joints
- Maintenance free battery
- Rubber track
- Retractable seatbelt
- Standard stick
- Suspension seat, vinyl covered
- "Thumb ready" sticks (standard equipment for all regions except Europe)
- Travel alarm (optional in Europe)

OPTIONAL EQUIPMENT

- Air conditioning
- Angle dozer blade with float function
- Beacon socket for canopy machines
- Boom check valve (Europe only)
- Boom mounted light
- Cab, radio ready with FOPS ISO 10262 (Level 1) and Tip-Over Protection (TOPS) ISO 12117 with heater/defroster, interior light and windshield wiper/washer
- Ecology drain valve for hydraulic tank
- Extra counterweight for extreme lifting applications
- High back suspension seat, fabric covered
- Hydraulic quick coupler lines
- Lifting eye on bucket linkage (optional in Europe, standard for all other regions)
- Long stick
- Mechanical quick coupler
- Mirrors for cab and canopy
- Seatbelt, 75 mm (3 in) wide (optional in Europe, standard in all other regions)
- Secondary auxiliary hydraulic lines
- Steel track and steel track with rubber pads

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

AEHQ6557 (01-12)

© 2012 Caterpillar
All Rights Reserved
Printed in U.S.A.

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, SAFETY.CAT.COM, their respective logos, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

